

Construction is as follows


- ※ Full port or conventional port;
- ※ Outside screw and yoke (OS & Y);
- ※ Two piece self-aligning packing gland;
- ※ Bolted bonnet & spiral wound gasket seal bonnet;
- ※ Bolted bonnet with spiral-wound gasket, threaded and seal welded bonnet or threaded and pressure seal bonnet;
- ※ Integral backseat;
- ※ Socket weld ends to ASME B16.11;
- ※ Screwed ends (NPT) to ANSI/ASME B1.20.1.

Application standards

- 1、 Design and manufacture conform to API 602、 BS5352、 ANSI B16.34;
- 2、 Connection ends conform to:
 - 1)Socket welded dimension conform to ANSI B16.11;JB/T1751
 - 2)Screw ends dimension conform to ANSI B1.20.1;JB/T7306
 - 3)Butt-welded conform to ANSI B16.25;JB/T12224
 - 4)Flanged ends conform to ANSI B16.5;JB79
- 3、 Test and inspection conform to: API 598; GB/T13927; JB/T9092
- 4、 Structure features:
 - Bolted bonnet, outside screw and yoke
 - Welded bonnet, outside screw and yoke
- 5、 Materials conform to ANIS/ASTM.
- 6、 Main materials: A105; LF2; F5; F11; F22; 304(L); 316(L); F347; F321; F51; Monel; 20 Alloy.

Main part materials list

NO.	Part name	A105/F6a	A105/F6aHFS	LF2/304	F11/F6aHF	F304(L)/304(L)	F316(L)/316(L)	F91/410 HF
1	Body	A105	A105	LF2	F11	F304(L)	F316(L)	F91
2	Seat	410	410HF	304	410HF	304(L)	316(L)	410HF
3	Wedge	F6a	F6a	F304	F6aHF	F304(L)	F316(L)	F6aHF
4	Stem	410	410	304	410	304(L)	316(L)	410
6	Bonnet	A105	A105	LF2	F11	F304(L)	F316(L)	F91
8	Pin	410	410	410	410	304	304	410
9	Gland	410	410	304	410	304	316	410
10	Gland eyebolt	B7	B7	L7	B16	B8(M)	B8(M)	B8
11	Gland flange	A105	A105	LF2	F11	F304	F304	F91
12	Hex nut	2H	2H	2H	2H	8(M)	8(M)	8
13	Stem nut	410	410	410	410	410	410	410
14	Locking nut	35	35	35	35	35	35	35
15	Nameplate	AL	AL	AL	AL	AL	AL	AL
16	Handwheel	A197	A197	A197	A197	A197	A197	A190
17	Lubricating gasket	410	410	410	410	410	410	410
18	Packing	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite
19	Stop nut	35	35	35	35	35	35	35
23	Seal gasket	420	420	304	304	304(L)	316(L)	420
24	P.S.ring	304	304	304	304	304	316	316
25	P.S.seat	420	420	304	304	304(L)	316(L)	F91
26	Nut pad	410	410	410	410	410	410	410
27	Packing nut	Cast steel	Cast steel	Cast steel	Cast steel	Stainless steel	Stainless steel	Cast steel

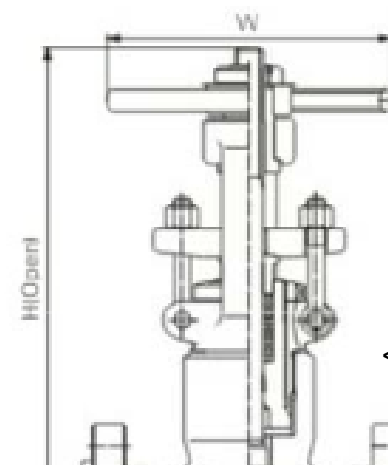

<----PRESSURE SEAL

CL2500 Pressure seal gate valves, full port outside screw and yoke(OS & Y)
Flange-welded or butt-welded ends; design to ASME B16.34

Specification(NPS)		1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
Face to face	L _(RF) ,L ₁ (BW)	-	-	264	273	308	-	384	451
	L _(RTJ)	-	-	264	273	308	-	387	454
Handwheel diameter	W	-	-	200	200	200	-	280	300
Height	H	-	-	321	321	327	-	456	550
Flow port dimension	d	-	-	13.5	18	18	-	29	36
Weight(Kg)		-	-	13.1	13.0	13.7	-	29.7	63.2